

DVB-T/H DIGITAL TV TRANSMITTERS

MOT 700 DVB-T/H


The **MOT 700 DVB-T/H** transmitter provides a cost-effective solution to meet the most demanding requirements of today's Digital Terrestrial Television Broadcasting. It is made up of the **DVB-T/H modulator** and the **S 700 DVB-T** amplifier. An intermediate external driver is included in order to improve the efficiency of the final amplifying stage. Using the complete alarm and digitalized information systems of this transmitter, the user can control the most relevant parameters of the modulation (according to EN 300 744 standard) and of the amplifying stages. Digital telemetry output is included, and critical or non-critical mask filter can be supplied.



(I+D)

3MOT S1500 YAV 3DIR SGP 2-R COM LIM3 MMS 412 MIX ONE100

DTP3 TX3000

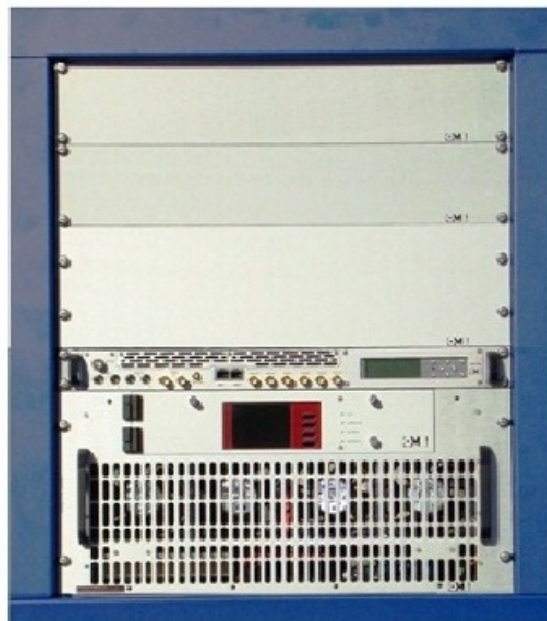

TECHNICAL FEATURES	
SIGNAL PROCESSING (EN 300 744)	
IFFT	2K, 4K and 8K
GUARD INTERVAL	1/4, 1/8, 1/16 and 1/32
CODE RATE	1/2, 2/3, 3/4, 5/6 and 7/8
CONSTELLATION	QPSK, 16-QAM and 64-QAM
HIERARCHICAL MODE (OPTIONAL)	16-QAM and 64-QAM with $\alpha=1, 2, 4$
NETWORK MODE	MFN/SFN
BANDWIDTH	8MHz and 7MHz (5/6MHz optional)
INPUTS	
MPEG-2	4 ASI inputs and Ethernet Gigabit input 188/204 bytes Bit rate: 4.98-31.67Mbps Connector: BNC Female 75 Ω
CLOCK REFERENCE	Connector: BNC (50 Ω / >1K Ω adj.) Frequency: 10MHz Level: 100mV - 3Vpp
TIME REFERENCE	Connector: BNC (50 Ω / >1K Ω adj.) Frequency: 1 PPS Level: TTL
PRECORRECTOR	
NON-LINEAR CORRECTION	Gain correction: 12dB max. Phase correction: -6 to +30°
LINEAR CORRECTION	Amplitude correction: $\pm$ 10dB Amplitude resolution: 0.01dB Group delay correction: $\pm$ 1000ns Group delay resolution: 1ns
RF OUTPUT (DVB-T MODULATOR)	
CENTRAL FREQUENCY	30 ~ 1000MHz adj. (1Hz step)
FREQUENCY STABILITY	1ppm
SPECTRAL POLARITY	Inverted / Non-inverted
GROUP DELAY	$\pm$ 10ns (pre-filter)
AMPLITUDE-FREQUENCY RESPONSE	$\pm$ 0.5dB (pre-filter)
PHASE NOISE	-90dBc/Hz at 1kHz
AMPLIFICATION	
FREQUENCY RANGE	Bands IV & V UHF: 470 ~ 862MHz
AMPLIFICATION CLASS	Driver: A-Class Final amplifier: AB-Class
OUTPUT CONNECTOR	EIA 7/8"
OUTPUT IMPEDANCE	50 Ω
TEST MONITOR OUTPUT CONNECTOR	BNC Female
TEST MONITOR OUTPUT IMPEDANCE	50 Ω
SPURIOUS (WITH OUTPUT FILTER)	< -60dBc
HARMONICS (WITH OUTPUT FILTER)	< -60dBc
SHOULDERS	< -37dBc
MER	> 36dB
NOMINAL POWER	700Wrms
CONTROL AND VISUALIZATION	
OUTPUT POWER CONTROL	Automatic/ Manual
PARAMETER VISUALIZATION	On LCD Display (output power, reflected power, voltages and currents, temperature?)
RS-232 INTERFACE	Connector: 9-pin SUB-D Female
HW INTERFACE	Connector: 9-pin SUB-D Female
ETHERNET	RJ45; modulator parameters control and visualization through HTTP and SNMP protocols
POWER SUPPLY	
VOLTAGE	90 ~ 264V _{AC}
FREQUENCY	47 ~ 63Hz
TOTAL CONSUMPTION	3.3kVA
MECHANICAL FEATURES (WITHOUT RACK)	
TEMPERATURE	0-45°C
COOLING	Forced air
DIMENSIONS	10RU 19"rack (483 x 44 x 483mm)
WEIGHT	80Kg (176lbs)

OMB AMERICA

teléfono (305) 477-0973
(305) 477-0974
fax. (305) 477-0611
3100 NW 72nd. Ave. Unit 112
MIAMI, Florida 33122 USA

<http://www.omb.com>
usa@omb.com

OMB EUROPA

departamento comercial fábrica y laboratorio
teléfono. 976 141717 teléfono. 976 141717
fax. 976 141718 fax. 976 141718
Pol. Ind. Centrovía
C/Paraguay, 6 (LA MUELA)
50198 Zaragoza, ESPAÑA

www.omb.es
europa@omb.com
comercial@omb.com

902 197 878
servicio atención al cliente